


6764

PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither it nor any reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.


APPLICATION		
NEXT ASS'Y	USED ON	VAR

REVISIONS				
REV	DESCRIPTION	ECN	DATE	APP'D
A	REVISED PER ECR	8823	3/6/98	DM3/98
B	UPDATE DIMS AND TOL	23185	11/29/05	DM11/05

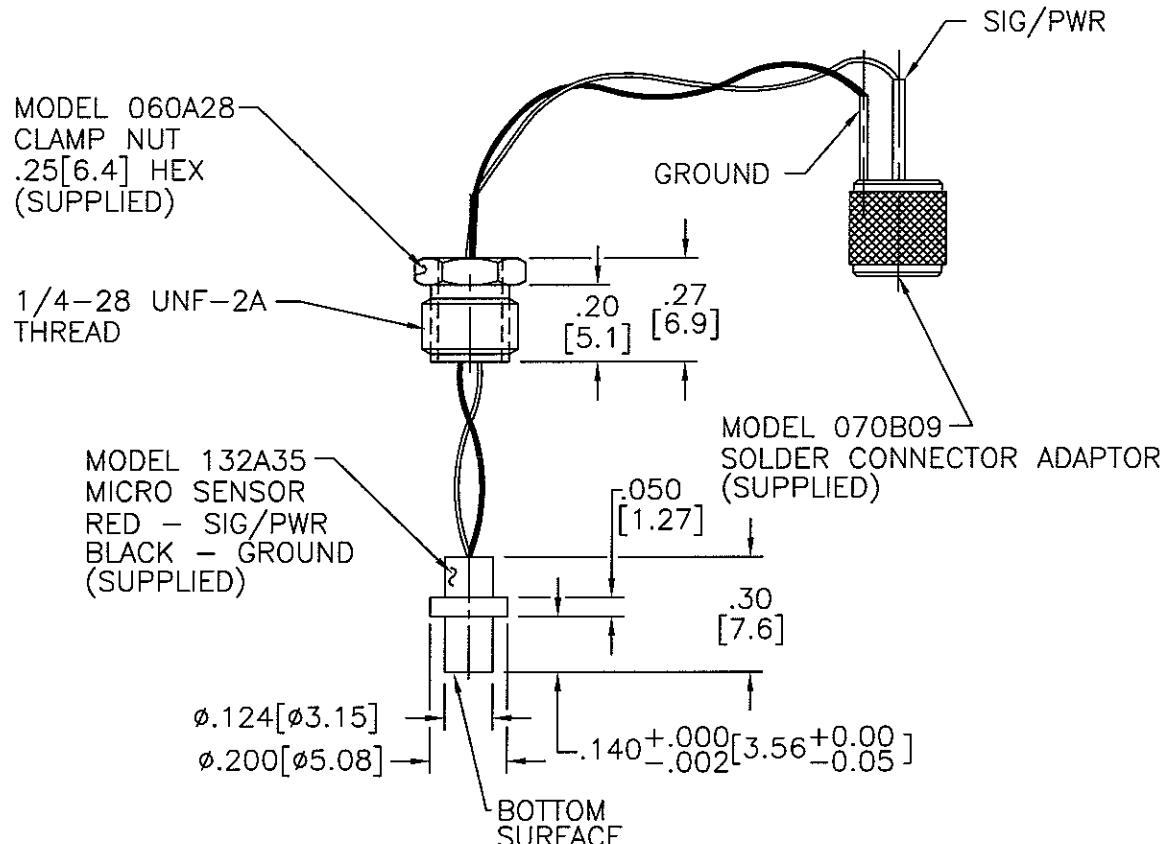

MOUNTING HOLE PREPARATION:

- Ø.1285 [Ø3.25]
- THRU
- └─┬─┐ Ø.203^{+0.002}_{-0.000} [Ø5.20^{+0.05}_{-0.00}]
- X .230 [.584] ▽
- 1/4-28 UNF-2B
- X .150 [3.81] ▽



1. LIGHTLY COAT THE INSIDE DIAMETER OF MOUNTING HOLE, OUTSIDE DIAMETER OF MICRO SENSOR (MODEL 132A35), AND CLAMP NUT (MODEL 060A28) WITH RTV.
2. INSERT MICRO SENSOR INTO MOUNTING HOLE.
3. HAND TIGHTEN CLAMP NUT INTO MOUNTING HOLE.
4. REMOVE EXCESSIVE RTV FROM MICRO SENSOR AND MOUNTING HOLE SURFACES.
5. ALLOW RTV TO FULLY CURE.

UNLESS SPECIFIED TOLERANCES		DRAWN	ECB	1/25/05	MFG	RRR	12-1-05	 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 EMAIL: SALES@PCB.COM
DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS [IN BRACKETS]	CHK'D	DM	11/30/05	ENGR	RF	12/4/05	
DECIMALS XX ±0.03	DECIMALS X ±0.8	APP'D	MEU	12/2/05	SALES	Jmm	11/30/05	CODE IDENT. NO. 52681
XXX ±0.010	XX ±0.25	TITLE						DWG. NO.
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES	INSTALLATION DRAWING						6764
FILLETS AND RADII .003 - .005	FILLETS AND RADII [0.07 - 0.13]	MODEL 132A35						SCALE: 2X
DD011 REV. C 01/21/03		MICRO SENSOR						SHEET 1 OF 1