

Model Number  
VO622A01

# HIGH FREQUENCY INDUSTRIAL ICP® VELOCITY SENSOR

Revision: G  
ECN #: 30750

	ENGLISH	SI	
<b>Performance</b>			
Sensitivity(± 10 %)	100 mV/in/sec	3937 mV/m/sec	[2]
Measurement Range	± 50 in/sec	± 1.27 m/sec	
Frequency Range(± 10 %)	240 to 270,000 cpm	4 to 4500 Hz	[3][4]
(± 3 dB)	180 to 540,000 cpm	3 to 9000 Hz	
Resonant Frequency	1200 kcpm	20 kHz	[1]
Broadband Resolution(1 to 10,000 Hz)	450 µin/sec	11.4 µm/sec	[1]
Non-Linearity	± 1 %	± 1 %	[5]
Transverse Sensitivity	≤ 5 %	≤ 5 %	
<b>Environmental</b>			
Overload Limit(Shock)	5000 g pk	49,050 m/s <sup>2</sup> pk	
Temperature Range	-65 to +250 °F	-54 to +121 °C	
Temperature Response	See Graph	See Graph	[1]
<b>Electrical</b>			
Settling Time(within 1% of bias)	≤ 30 sec	≤ 30 sec	
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	
Constant Current Excitation	2 to 10 mA	2 to 10 mA	
Output Impedance	<100 ohm	<100 ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Spectral Noise(10 Hz)	40 µin/sec/√Hz	1.12 µm/sec/√Hz	[1]
(100 Hz)	7.0 µin/sec/√Hz	0.18 µm/sec/√Hz	[1]
(1 kHz)	0.4 µin/sec/√Hz	0.01 µm/sec/√Hz	[1]
Electrical Protection	RFI/ESD	RFI/ESD	
Electrical Isolation	>10 <sup>8</sup> ohm	>10 <sup>8</sup> ohm	
<b>Physical</b>			
Size (Hex x Height)	7/8 in x 2.06 in	22 mm x 52.3 mm	
Weight	3.3 oz	94 gm	[6]
Mounting Thread	1/4-28 Female	1/4-28 Female	
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 N-m	
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Stainless Steel	Stainless Steel	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	MIL-C-5015	MIL-C-5015	
Electrical Connection Position	Top	Top	

**OPTIONAL VERSIONS**  
Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

**CS** - Canadian Standards Association Approved Intrinsically Safe  
Hazardous Area Approval CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I  
CI I, Div I, Groups A, B, C, D; CI II, Div I, Groups E, F, G; CI III, Div I  
Exia IIC T4, AExia IIC, T4  
CI I, Div 2, Groups A, B, C, D; ExnL IIC T4, AExnA IIC T4

**EX** - Hazardous Area Approval- contact factory for specific approvals  
Hazardous Area Approval EEx ia IIC T4, -54°C≤Tas≤121°C, II 1 G  
EEx ia IIC T4, -54°C≤Tas≤121°C, II 1 G


**M** - Metric Mount  
Supplied Accessory : Model M081A61 Mounting Stud 1/4-28 to M6 X 1 (1)

**NOTES:**

- [1] Typical.
- [2] Conversion Factor 1g = 9.81 m/s<sup>2</sup>.
- [3] The high frequency tolerance is accurate within ±10% of the specified frequency.
- [4] 1Hz = 60 cpm (cycles per minute).
- [5] Zero-based, least-squares, straight line method.
- [6] 1/4-28 has no equivalent in S.I. units.
- [7] See PCB Declaration of Conformance PS023 or PS061 for details.

**SUPPLIED ACCESSORIES:**

Model 081A40 Mounting Stud (1)  
Model ICS-1 NIST-traceable single-axis amplitude response calibration from 600 cpm (10 Hz) to upper 5% frequency (1)

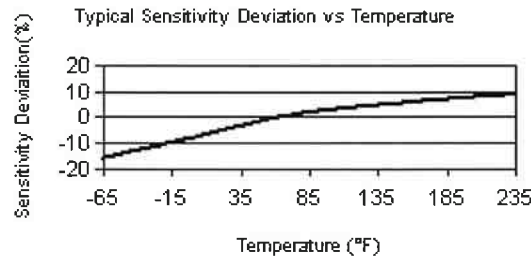

All specifications are at room temperature unless otherwise specified.  
In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB Group, Inc.

Entered: JJA	Engineer: JEC	Sales: JJA	Approved: JJA	Spec Number:
Date: 2-5-10	Date: 5-18-09	Date: 11-10-08	Date: 11-7-08	10163

**IMI SENSORS**  
A PCB PIEZOTRONICS DIV.  
3425 Walden Avenue, Depew, NY 14043

Phone: 800-959-4464  
Fax: 716-684-3823  
E-Mail: imi@pcb.com