

134-1010-90


APPLICATION

| QTY. | NEXT ASSY | USED ON | VAR |
|------|-----------|---------|-----|
| | | | |
| | | | |
| | | | |


REVISIONS

| SYM. | DESCRIPTION | EO | DATE | APP'D |
|------|----------------------|---------|---------|-------|
| A | REVISED AS PER ECR # | 1213 Rg | 6-28-83 | FOR |
| B | REV PER ECR # | 1374 | 2-2-84 | FOR |

ELECTRICAL CONNECTOR
COAXIAL 10-32 UNF-2A

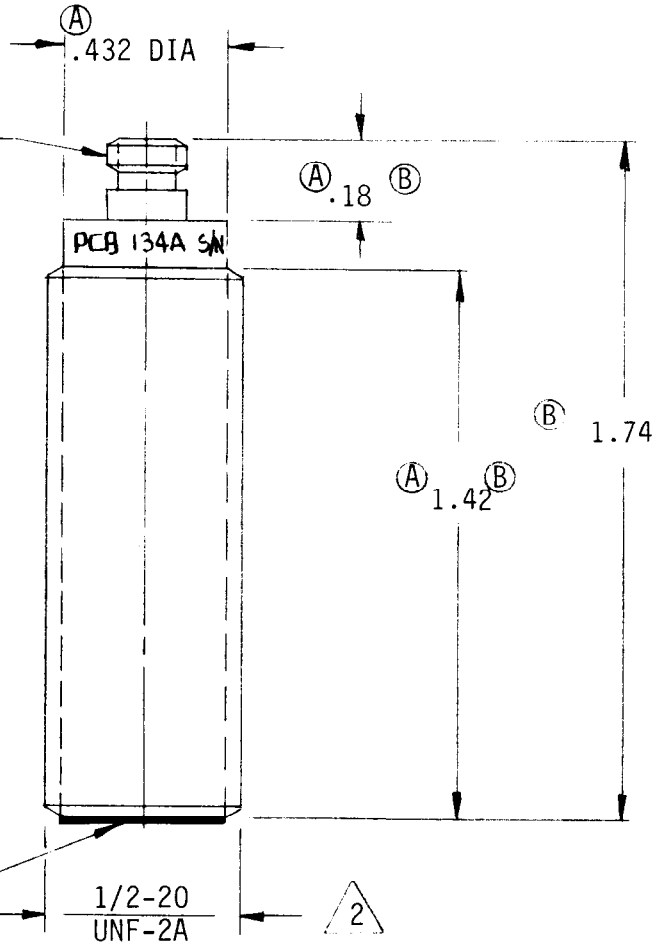

MOUNTING HOLE PREPARATION:
DRILL ".29/64" (.453 DIA)
THRU
TAP 1/2-20 UNF-2B
THRU

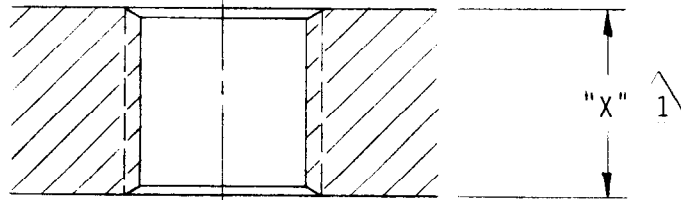

PREVIOUS SUSQUEHANNA INSTRUMENT MOD NO \$T4

- 2 TEFロン TAPE OR OTHER THREAD SEALANT IS RECOMMENDED.
- 1 "X" DIMENSION TO SUIT USER REQUIREMENTS.

| | | | | | | | | |
|---|-----------------|------------------|-----|---------|-----------------------------|------|---------|---|
| <p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES.</p> <p>TOLERANCES</p> <p>FRACTIONS ± 1/64</p> <p>DECIMALS XX ± .01 XXX ± .005</p> <p>ANGLES ± 1/2 DEG.</p> <p>BREAK SHARP EDGES .003 - .005</p> | MATERIAL | DRAWN | Rg | 4/24/83 | MFG. | J.T. | 4/83 | <p>pcb piezotronics, inc.</p> <p>BUFFALO, NEW YORK 14225</p> |
| | HEAT TREAT | CHECKED | FOR | 4/25/83 | ENGR. | MT | 4/25/83 | |
| | EXCEPT AS NOTED | APP'D | | | RELEASE NO. | | | |
| | FIN | TITLE | | | INSTALLATION DRAWING | | | |
| | | MODELS 134A, A02 | | | DYNAMIC PRESSURE TRANSDUCER | | | <p>CODE IDENT. NO.</p> <p>134-1010-90</p> |
| | | | | | SCALE 2:1 | | | SHEET 1 OF 1 |