


Model Number
340A15

ICP[®] ACCELEROMETER

Revision: B
ECN #: 14822

	ENGLISH	SI	
Performance			
Sensitivity (±10 %)	9.8 mV/g	1.0 mV/(m/s ²)	
Measurement Range	±500 g pk	± 4900 m/s ² pk	
Frequency Range (±5 %)	1 to 12000 Hz	1 to 12000 Hz	
Frequency Range (±10 %)	0.7 to 18000 Hz	0.7 to 18000 Hz	
Frequency Range (±3 dB)	0.35 to 25000 Hz	0.35 to 25000 Hz	
Resonant Frequency	≥50 kHz	≥50 kHz	
Broadband Resolution (1 to 10000 Hz)	0.0006 g rms	0.006 m/s ² rms	[1]
Non-Linearity	≤1 %	≤1 %	[2]
Transverse Sensitivity	≤5 %	≤5 %	[3]
Environmental			
Overload Limit	±10000 g pk	± 98100 m/s ² pk	
Temperature Range	-67 to +257 °F	-55 to +125 °C	
Temperature Response	See Graph	See Graph	
Base Strain Sensitivity	≤0.006 g/με	≤ 0.06 (m/s ²)/με	[1]
Electrical			
Excitation Voltage	18 to 30 VDC	18 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤100 ohms	≤100 ohms	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Discharge Time Constant	0.4 to 1.2 sec	0.4 to 1.2 sec	
Settling Time (within 10% of bias)	<10 sec	<10 sec	
Spectral Noise (1 Hz)	234 μg/√Hz	2300 (μm/s ²)/√Hz	[1]
Spectral Noise (10 Hz)	50 μg/√Hz	490 (μm/s ²)/√Hz	[1]
Spectral Noise (100 Hz)	10 μg/√Hz	98 (μm/s ²)/√Hz	[1]
Spectral Noise (1 kHz)	5 μg/√Hz	49 (μm/s ²)/√Hz	[1]
Physical			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Welded Hermetic	Welded Hermetic	
Size (Hex x Height)	0.31 in x 0.43 in	8.0 mm x 10.9 mm	
Weight	0.07 oz	2.0 gm	[1]
Electrical Connector	M3 Coaxial Jack	M3 Coaxial Jack	
Electrical Connection Position	Side	Side	
Mounting Thread	M3 x 0.50 Male	M3 x 0.50 Male	
Mounting Torque	8 to 12 in-lb	90 to 135 N-cm	

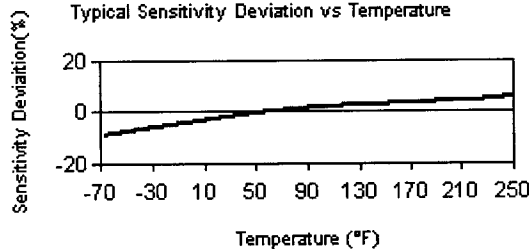

All specifications are at room temperature unless otherwise specified.
In the interest of constant product improvement, we reserve the right to change specifications without notice.
ICP[®] is a registered trademark of PCB Group, Inc.

OPTIONAL VERSIONS

Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

A - Adhesive Mount [5]
Supplied Accessory : Model 080A90 Quick Bonding Gel (1)

J - Ground Isolated		
Frequency Range (+5 %)	10 kHz	10 kHz
Frequency Range (+10 %)	15 kHz	15 kHz
Frequency Range (+3 dB)	20 kHz	20 kHz
Resonant Frequency	≥40 kHz	≥ 40 kHz
Electrical Isolation (Base)	>10 ⁸ ohms	>10 ⁸ ohms
Size (Hex x Height)	0.39 in x 0.55 in	10.0 mm x 14.0 mm
Weight	0.11 oz	3.0 gm

W - Water Resistant Cable		
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable
Electrical Connection Position	Side	Side

NOTES:

- [1] Typical.
- [2] Zero-based, least-squares, straight line method.
- [3] Transverse sensitivity is typically <= 3%.
- [4] See PCB Declaration of Conformance PS023 for details.
- [5] Mounting stud removed, adhesive mounting base not required.

SUPPLIED ACCESSORIES:

- Model 080A109 Petro Wax (1)
- Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)
- Model M080A15 Adhesive Mounting Base (1)

Entered: <i>RJL</i>	Engineer: <i>DJS</i>	Sales: <i>SL</i>	Approved: <i>RA</i>	Spec Number:
Date: <i>7/31/02</i>	Date: <i>7/31/02</i>	Date: <i>7/31/02</i>	Date: <i>7/31/02</i>	13562

PCB PIEZOTRONICS
VIBRATION DIVISION
3425 Walden Avenue, Depew, NY 14043

Phone: 716-684-0001
Fax: 716-685-3886
E-Mail: vibration@pcb.com