


Performance	ENGLISH	SI	
Sensitivity(± 10 %)	3 pC/g	0.31 pC/(m/s <sup>2</sup> )	
Measurement Range	± 2300 g pk	± 22,600 m/s <sup>2</sup> pk	
Frequency Range(+5 %)	12 kHz	12 kHz	[2]
Frequency Range(+10 %)	16 kHz	16 kHz	[2]
Frequency Range(+3 dB)	26 kHz	26 kHz	[2]
Resonant Frequency	≥ 50 kHz	≥ 50 kHz	
Non-Linearity(1600 g, 15700 m/s <sup>2</sup> )	≤ 1 %	≤ 1 %	[3]
Non-Linearity	≤ 2 %	≤ 2 %	[3]
Transverse Sensitivity	≤ 5 %	≤ 5 %	
<b>Environmental</b>			
Overload Limit(Shock)	± 10,000 g pk	± 98,100 m/s <sup>2</sup> pk	
Temperature Range	-95 to +500 °F	-71 to +260 °C	
Temperature Response	See Graph	See Graph	[1]
Base Strain Sensitivity	0.002 g/με	0.02 (m/s <sup>2</sup> )/με	[1]
<b>Electrical</b>			
Capacitance	485 pF	485 pF	[1]
Insulation Resistance(at 70° F [21°C])	>10 <sup>12</sup> ohm	>10 <sup>12</sup> ohm	
Insulation Resistance(at 500°F)	>10 <sup>8</sup> ohm	>10 <sup>8</sup> ohm	[1]
Output Polarity	Negative	Negative	
<b>Physical</b>			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Welded Hermetic	Welded Hermetic	
Size (Hex x Height)	0.28 in x 0.64 in	7.1 mm x 16.3 mm	
Weight	0.071 oz	2.0 gm	[1]
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Top	Top	
Mounting Thread	5-40 Male	5-40 Male	

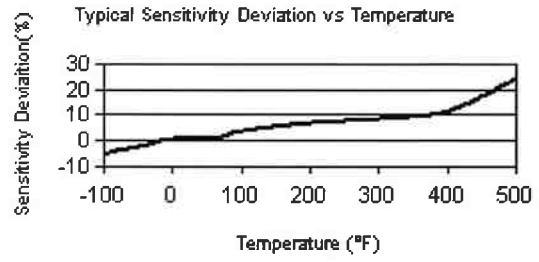

All specifications are at room temperature unless otherwise specified.  
 In the interest of constant product improvement, we reserve the right to change specifications without notice.  
 ICP® is a registered trademark of PCB Group, Inc.

OPTIONAL VERSIONS		
Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.		
<b>A - Adhesive Mount</b>		[4]
Supplied Accessory : Model 080A90 Quick Bonding Gel (1)		
<b>J - Ground Isolated</b>		
Frequency Range(+5 %)	10 kHz	10 kHz
Frequency Range(+10 %)	13.5 kHz	13.5 kHz
Resonant Frequency	>49 kHz	>49 kHz
Electrical Isolation(Base)	>10 <sup>8</sup> ohm	>10 <sup>8</sup> ohm
Size - Hex x Height	0.375 in x 0.72 in	9.52 mm x 18.3 mm
Weight	0.11 oz	3.2 gm
<b>M - Metric Mount</b>		
Mounting Thread	M3 x 0.50 Male	M3 x 0.50 Male
<b>P - Positive Output Polarity</b>		
Output Polarity	Positive	Positive
<b>W - Water Resistant Cable</b>		[5]
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable
Electrical Connection Position	Top	Top

**NOTES:**  
 [1] Typical.  
 [2] Low frequency response is determined by external signal conditioning electronics.  
 [3] Zero-based, least-squares, straight line method.  
 [4] Adhesive mounting base is not required. "Quick Bonding Gel" has maximum temperature range of 180 ° F (82°C).  
 [5] Capacitance will vary based on cable length. Typical cable capacitance is 29 pF/ft (95 pF/m).

**SUPPLIED ACCESSORIES:**  
 Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)

Entered: <u>BLS</u>	Engineer: <u>JJB</u>	Sales: <u>WDC</u>	Approved: <u>EB</u>	Spec Number:
Date: <u>3/2/09</u>	Date: <u>2/10/09</u>	Date: <u>2/11/09</u>	Date: <u>2/23/09</u>	1326

	Phone: 716-684-0001 Fax: 716-685-3886 E-Mail: vibration@pcb.com
3425 Walden Avenue, Depew, NY 14043	