



FORGET THE REST CHOOSE THE BEST



FFT WITH UP TO 3 276 800 LINES
90 KHZ FREQUENCY RANGE
RAW SIGNAL RECORDING
OVERALL, TIMEWAVE, SPECTRUM,
ORBIT, FRF, CENTERLINE ETC.

Enjoy a huge touchscreen to analyze your machinery on site.
Measure 4 vibration signal channels and 4 process value
channels (temperature, pressure etc.) along with speed
synchronously. Triaxial sensor friendly, proximity probes for
displacement measurement ready, balancer, octave analysis,
bump test, ODS, MCSA - you name it ...

8 CHANNEL SIGNAL ANALYZER

- › 4 AC inputs for vibration measurement
- › 4 DC inputs for process values measurement
- › Tacho input (speed/trigger)



VA5^{PRO}




MULTITASKING ANALYZER

The VA5^{PRO} allows you to measure
more measurement types
synchronously. Overall values,
FFTs, Time waveforms - on all
4 channels? No problem ...



YOU CAN HEAR IT


Ultrasound microphone
for leak detection

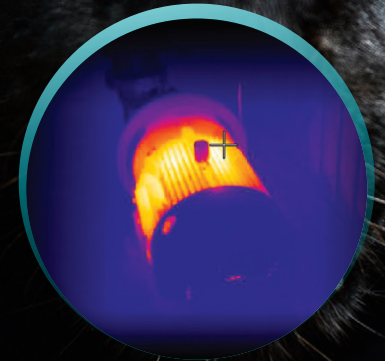

YOU CAN SEE IT

Thermal imaging camera

- › Vibration analyzer
- › Balancer
- › RAW signal recorder
- › Thermal imaging camera
- › Machine faults autodetection
- › Route data collector
- › Sound analyzer
- › Operating Deflection Shapes
- › Ultrasound detector
- › Run Up - Coast down
- › Lubrication monitoring
- › Stethoscope

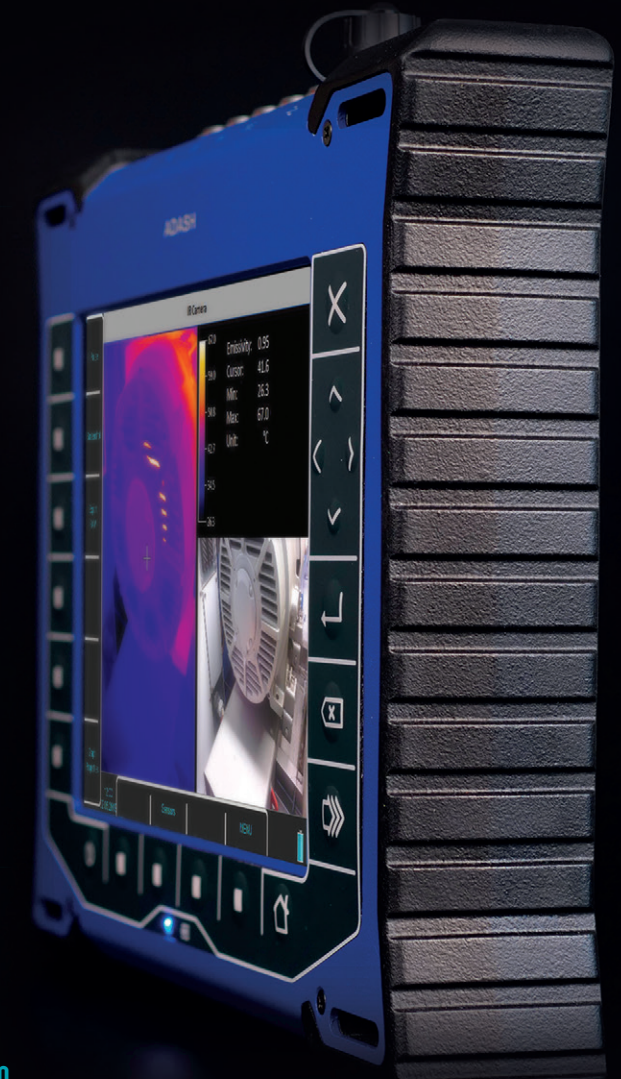

There is simply no way to show all the VA5^{PRO}
measurement capabilities on 4 pages ... see www.adash.com

VA5^{PRO} SPECIFICATIONS

Input channels	• 4 x AC, ICP® power supply on/off • 4 x DC for process values • 1 x TACHO for speed probe/external trigger
Input range	• AC +/- 12 V peak-peak • DC +/- 24V
AD conversion	• 24 bit, 64 bit internal signal processing • No AutoGain function!
Dynamic range S/N	• 120 dB
Frequency ranges (-3 dB)	• Maximum range: 0.35 Hz - 90 kHz (1 Ch, 194 kHz sampling) • Maximum range: 0.35 Hz - 25 kHz (4 Ch, 64 kHz sampling) • Minimum range: 0.35 Hz - 25 Hz (4 Ch, 64 Hz sampling)
Sampling mode	• Fully simultaneous for 4 channels
FFT resolution	• Min. 100 lines • Max. 3 276 800 lines
Unit modes	• Analyzer - analytical measurements • Data collector - route measurements • Balancer - 1 and 2 plane on site balancing • Run up - run up and coast down measurements • Recorder - raw signal recording for later post analysis • Stethoscope - listening of the bearing/machine noise • FASIT - expert system for automatic fault detection • Octave analyzer - hearable sound measurements • Bump test - measurement of natural frequencies • ADS - Animated Deflection Shapes (Operating deflection shapes) • Ultrasound - measurement of ultrasound in 30 - 50 kHz range • Camera • IR Camera • Gallery

Display	• 1125 x 800 pixels
Built-in camera	• 5 MPx, autofocus
Thermal imaging camera (optionally)	• 384 x 288 pixels • -10°C ~ 250°C temp. range • 50 mK NETD sensitivity
Processor	• Intel Atom 1.9 GHz
Memory, Route	• 64 GB, max. 16 GB for one route, number of routes is limited by free memory only
Data processing	• Real time FFT • DEMOD - ENVELOPE analysis • ACMT - low speed bearing analysis • Order analysis • User band pass analysis • RPM measurement • DC measurement • Orbit measurement
Raw signal recorder	• 64 kHz sampling frequency • 4 Ch memory consumption 3 GB/hour • 4 Ch total recording - 20 hours
Trigger	• Manual, External, Signal level, Time • Speed change, Time interval
Interface	• USB 3.0, 2.0 compatible
Operating temperature range	• -10°C to +50°C
Power	• Battery 8 hours of operation, AC 230 V
Case	• Aluminium heavy duty
Size & Weight	• 29,5 x 23 x 4,9 cm, 2 Kg



dollenmeier
Sensoren, Messtechnik, Beratung

Ing. Büro Dollenmeier GmbH
Regensbergstrasse 16
CHF-8157 Dielsdorf

www.dollenmeier.ch
sales@dollenmeier.ch

Tel. +41 (0)44 885 45 11
Fax +41 (0)44 885 45 12

Adash, spol. s r.o.

Hlubinska 32
702 00, Ostrava
Czech Republic

e-mail: info@adash.com
phone: +420 596 232 670

www.adash.com

MASTER THE LANGUAGE OF YOUR MACHINERY

