





PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.



ESD SENSITIVE
CLASS 2 HANDLING REQUIRED

ITAR CONTROLLED PRODUCT

THIS PRODUCT IS A CONTROLLED ITEM UNDER THE INTERNATIONAL TRAFFIC IN ARMS REGULATIONS (ITAR) ADMINISTERED BY THE DIRECTORATE OF DEFENSE TRADE CONTROLS. ANY EXPORT OF THIS PRODUCT FROM THE UNITED STATES, INCLUDING ANY ITEM IN WHICH THIS PRODUCT MAY BE INCORPORATED, REQUIRES APPROPRIATE AUTHORIZATION FROM THE U.S. DEPARTMENT OF STATE. DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.

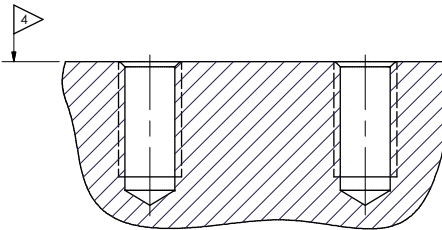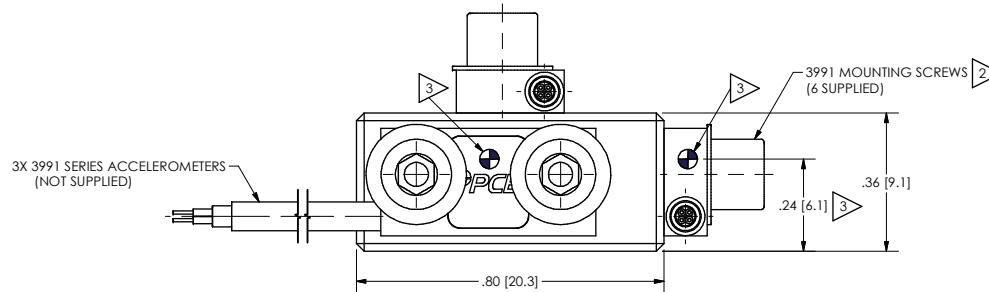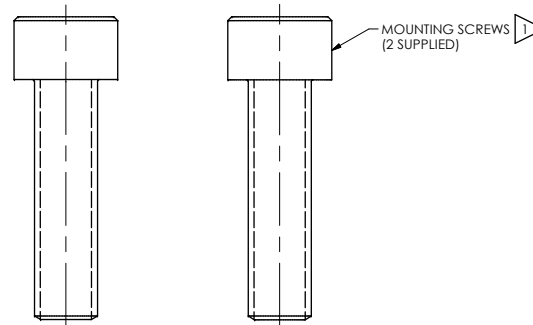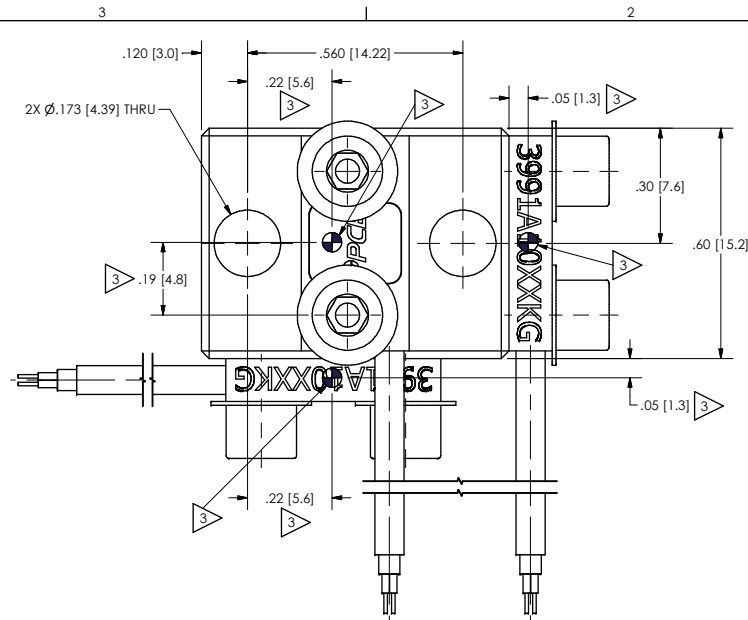

MOUNTING HOLE PREPARATION:
Ø.136 [3.45] ∇ .335 [8.51]
8-32 UNC-2B ∇ .300 [7.62]

- 4 RECOMMENDED MOUNTING SURFACE SHOULD BE FLAT TO WITHIN .0003(.008) TIR OVER Ø1.00 [25.4] WITH A 32 [0.8] FINISH FOR BEST RESULTS.
- 3 CENTER OF SEISMIC MASS.
- 2 RECOMMENDED MOUNTING TORQUE ON CAP SCREW, 6-8 IN LBS[68-90 N-CM].
- 1 RECOMMENDED MOUNTING TORQUE ON CAP SCREW, 8-15 IN LBS[90-170 N-CM].

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:						DRAWN		CHECKED		ENGINEER		 PCB PIEZOTRONICS™ 3425 WALDEN AVE. DEPEW, NY 14043 (716) 684-0001 E-MAIL: sales@pcb.com			
DIMENSIONS IN INCHES			DIMENSIONS IN MILLIMETERS [IN BRACKETS]			MDP	2/17/10	SMB	2/17/10	BAM	2/12/10				
DECIMALS XX ±.01 XXX ±.005			DECIMALS X ±0.3 XX ±0.13			TITLE INSTALLATION DRAWING MODEL 080A213 TRIAXIAL MOUNTING BLOCK						CODE IDENT. NO. 52681		DWG. NO. 45321	
ANGLES ± 2 DEGREES			ANGLES ± 2 DEGREES									SCALE: 4 X		SHEET 1 OF 1	
FILLETS AND RADII .003 - .005			FILLETS AND RADII 0.07 - 0.13												